G. R. S. IX-5]

Previous references.

1917.
(Murray

File No. 676-1

Serial Nos. 1–6

Later references.

35—23

GENERAL AND REVENUE SECRETARIAT.

Serial Nos. 1–6

Part B for June 17

SUBJECT.

Repairs due on Chemakesaca Masonic Temple at Belen

No 2972-S 25-6-17

2o. Mr Dy Comm. Habana do
" Comptr. Govt
" Insp. Genl
" Chief Engr
Sanctions & recites as set forth 5869 for

W D 88—GPB—50,000—24-7-16

W Zabriskie

G R.S. 11] 1913-14

GENERAL AND REVENUE SECRETARIAT.

(Murai)

NOTES.

File No. 676-73

FILE HEADING.

Repairs to the temple of Sri Channakesavaswami at Belur - D.R.A. subject No. 767 of 1913.

From

No.	Dated	Received
Diary No. 2439	Enclos.	Spare Copies	Serial No.

BRIEF ABSTRACT OF LETTER.

NOTES AND ORDERS.

Draft forwarding the Dr Comr is subd

RK (63)
12/8

28/8/14

28/8/14.

NOTES—First Sheet.

GPB—35 000—15 6 12

G. R. S. 12]

General and Revenue Secretariat.

File No. 676 of 1913.

Serial No.	
2	To. D. C Hassan. No. 525 Dy 1st September 1914 Invites attention to D. R A Subject no 767 and calls for an Estimate for repairing the temple Hassan subject No 213 of 1914 on the same subject The question of repairs to Sri Channakesava Swami temple at Belur had come up during the Dasara meeting of 1914 the matter is pending with D.C. Hassan Submp. with a Ref. MMS) 22. 5. 1915. 29/5/15
	To the D. C. Hassan., letter no 2788 of 4-6-15. Invites attention to Sl no 2 and also D.R.A. subject no 213 of 1914 re repairs to the Sri Channakesava Swami temple at Belur and requests an early reply.
3	From the Supdg Engr no. 408 4/E. 111-10 of 2 — Submits, with refce to D.R.A. subject no. 213 of 1914, an estimate for Rs 11,250/- for completing the repairs to ~~Sri~~ the

NOTE—Contn. sheet.

GPR—10,000—13 6 14

General and Revenue Secretariat.

Mug File No. 676 of 1913

Serial No.	
	Sanctioned,
	(3) If the annual grant of Rs 1000/- for the upkeep of the present renovation is to be sanctioned, the source from which it is to be met.
	(4) Whether the estimate should be asked to be revised and added to on account of repairs proposed to be executed to the stone mantap (vide Mug F. 717 of 1912).
	8/9 9/6
4	From the Mayrai Supt of Letter no. 1917 - 9/16 Submits in original for orders letter no. 4682 of 8-6-15 together with an estimate received from the Supdtg Engr, Southern Circle, regarding the repairs to the Chennakeswaraswami temple at Belur. The estimate recd from the Supdtg Engr direct (Sl. no-3 above) is the same as the above Subd for orders 9/8 The Dept Comrs' reply need not be awaited as the Estimate furnished them by the Executive Engr was countersigned by him and returned. The Estimate is for a large amt viz Rs 11,250 made up of Rs 10180

NOTE—Contn. sheet.

GPB—25,000—22-3-15

Serial No.

for the repairs proper, and Rs 1,070 for Establishment, Tools & Plant charges. The question of the source of the cost is fully dealt with in the linked file 336/12-13 and the Ch Engr has been asked to report whether the cost of the repairs to the temple may not be charged to the D.P.W. budget. A reply is due to this ref^e from the Ch Engr, and a draft rem^r is put in that file. His reply may probably be awaited before this Estimate is taken up for consideration.

RL
11.8.15

Mem^r to the No. 717 of 1912 re repairs of the stone mantap which has been ordered to be put to the Mr. member with a draft letter to the ~~Supdg~~ Chief Engineer, has been to the portfolio for reference in connection with this & other files ~~of~~ dealing with the affairs of this temple. As the repairs to the stone mantap need not be included in the general work under consideration, that file (Mem^r 717—12) may be put to the Mr. member after receipt of the draft portfolio.

RL
11.8.15

NOTE—Contn. sheet.

GPB—25,000—22-3-15

General and Revenue Secretariat. | Dm 3 File No. of 191

Serial No.	
D 25.	5 From the Supdg Engr, Southern Circle, no. 6786 dt 11-8-15. Invites reference to his letters no. 4084 dt 17-5-15 (Sl 3) and no. 4602 dt 26-7-15 (Sl. 4) submitting an estimate for Rs 11,250, together with plans etc, for the complete repairs of the Sri Chenna-Kesavaswamy temple at Hindupur and requests early sanction to the said work.
8J	Vide memo dt no. 5475-14 in which the Engineer-in-Chief is requested to furnish certain details.
1/9	
8J 14.9.15	

NOTE—Contn. sheet.

GPB—25,000—30 4 15.

G. R. S. 12]

General and Revenue Secretariat.

Mun File No. 675 5775 of 1914-15

Serial No.

12. Submitted to 1st Member.

In the files submitted herewith three questions are brought up for orders.

Mun. 675 of 1913

1. Sanction of certain estimates to complete the special repairs of the Belur temple;

Mun 717 of 1912

2. Sanction of an estimate to repair a stone Mantap known as Kalachavadi; and

Mun 575 of 14 (this file).

3. Sanction of a separate annual allotment for the maintenance of the temple in place repairs.

13. The report of the Executive Engineer, Hassan, gives in detail the items work still requiring attention and the cost of the repairs aggregate to Rs.10,177/-. As regards the Kalachavadi Mantap, the Superintending Engineer, Southern Circle, considers that the Mantap fulfills an artistic want and that the local sentiment is altogether against its neglect or removal and that its thorough renovation will, therefore, be necessary. For this purpose an estimate for Rs.2493/- has been prepared which brings the total cost of the repairs found necessary to ~~Rs.12,670/-~~. Rs 12670

14. The next point to be considered is the question of the source from which the cost is to be met. In Government Order No.3979-82 dated 16th March 1908 sanction was accorded to

H W Mun 192 of 92-93

NOTE—Contn. sheet.

GPB—20,000—30-6-15

Serial No.

23 estimates aggregating to Rs.12,215/- and in directing that the works should be included in the Public Works Department programme, it was observed that the temple was a famous monument of Indian architecture and that its renovation was a matter both of Provincial and Imperial interest Rs.6000/- out of this amount was, however, met by the Muzrai grant under construction and the balance was provided for in the Public Works Budget. The present set of estimates is intended to complete the work taken up but the cost will have to be met wholly from the State Funds. After the execution of the present works there would still be a Vimana to rebuild and the design for this is said to be receiving attention.

15 The temple has not sufficient funds at its disposal to meet the cost, and the surplus income does not amount to much and will be required to improve the services in the temple itself. No funds can be made available from the State grant for construction as the present allotment of Rs.10,000/- a year does not go a long way to meet the demands made for the restoration of Muzrai Institutions standing in need of repairs of a more or less urgent nature. When the last contribution was made the budget allotment stood at Rs.15,000/-.

Pl. A. M.F. 678-13

vide Supdt. Engrs letter No. Dgs-2411-10 dated May 1915. It may however be stated that the question of debiting the balance of the cost to State funds was not then finally decided and a reply on the matter is awaited from the Chief Engineer.

M.F. 336-12

NOTE—Contn. sheet.

GPB—20,000—30 6-15

G. R. S. 12]

General and Revenue Secretariat.

Misc File No. 575 of 1915 (4)

Serial No

Coming to the question of an annual provision for the maintenance of the temple, the Superintending Engineer is of opinion that a sum of Rs.1000/- is necessary, but the Deputy Commissioner in his letter of 1st August 1914 recommends an allotment of Rs.1200/-. Whatever the ultimate sum is that is allotted, the amount has to be found as an additional grant to the temple or to the Muzrai Budget from the State Funds. In the alternative the building may be left to the Public Works Department for maintenance from the annual Budget allotment for repairs of civil buildings as in the case of the Halebid temples.

Ha
14.9.15

17. All the three items - Repairs of Temple and Kalchavadi, ~~should both be~~ and an annual Maintenance grant of 1000 Rs may be met from State P.W. Budget.

18. I think it would be best to regard the buildings as in charge of the P.W.D.

1574
20-9-15

NOTE--Contn. sheet.

GPH—20,000—30 6 15

18/9/15

18/9/15

G. R. S. 12]

General and Revenue Secretariat.

Murz/File No. 576 of 1914. 15.

(Below temple)

Serial No. 19

The Dewan desires to know what amount has been spent by the Public Works department on Mazpor buildings, during the past ten years. The figures for each year may kindly be furnished.

B. V. Lakshmana Row
16 11 15

1574

16/11/15

SI

to Forwarded unofficially with compliments to the Chief Engineer in Mysore for favor of furnishing the information required by the Dewan.

By Order
Veeraswamy Ayyangar
Pro Secretary

23.11.15

NOTE—Contn. sheet.

GPB—20,000—30-6-15

G. R. S. 12]

General and Revenue Secretariat.

File No 575 of 1914.

Serial No

Encl to off No 258/P.W.D. dt the 25th November 1915.

21 Returned with a statement showing the expenditure incurred on the Muzrai buildings in the State from the year 1905-06 to end of 1914-15.

< R V Sundaramma
For Chief Engineer of Mysore.

35

Bangalore,
12th January 1916.

H.R.R.

Submitd
am
13/1/16
22

Subject to decision
18.1.16

3698
19-1-16

23 May be reserved for the Dewan -
24/1/16

24 The P.W.D. should be requested to state, which of the works referred to, are most urgent. A selection of items from the ostimate may be made, so that the total expenditure may not exceed Rs.6,000. The remaining items may be

NOTE—Contn. sheet.

GRB—20,000 -30 6 15

R. S. 12]

General and Revenue Secretariat.

File No. 675 of 1914

Serial No.

be held over, for consideration in May 1917.

10.5.16. Ag

25 Reference to the Chief Engineer for favour of a reply to the above

Memorandum No 10 dt 12.5.16.

Ag
12.5.

Offl No 154/P&OD. dated the 17th May 1916.

NOTE—Contn. sheet.

GPB—25,000—2-11 14

Statement showing the amount spent year after year by the Public Works Department on the Imperial buildings from 1905-06 to 1914-15.

	Year		Temples		
			Works	Repairs	Total
1	1905	06		15.817	16 817
2	1906	07	5832	15.126	20958
3	1907	08	11.400	18466	29866
4	1908	09	3436	20358	23794
5	1909	10	1878	10373	12251
6	1910	11	2039	4776	6810
7	1911	12	5713	7011	12724
8	1912	13	746	10147	10893
	1913	14	18272	13780	32052
10	1914	15	21214	00	20515
	Total		70529	115.161	185690

P.W.D. 12

General and Revenue Secretariat | File No. of 191

Serial No.

In offl No 154/P.W.D. Dated the 17th May 916.

26 Returned with compliments to the Secretary to Government, General Department.

2. The total amount of the estimate as originally framed and submitted by the Superintending Engineer, Southern Circle, for the repairs of the Sri Chennakesavaswamy temple at Belur was Rs 13,744. As Government ordered that the expenditure should be limited to Rs 6,000, the Superintending Engineer was requested to select only very urgent items of work so that the total expenditure might not exceed that limit. Before doing so, the Superintending Engineer had to consult the temple authorities and the Amildar who is the local Muzrai officer.

3. The estimate now prepared in consultation with these authorities amounts to Rs 6,485 which after deducting the establishment and tools and plant charges works out to Rs (6,485 - 616) 5,869 only.

4. The report of the Executive Engineer attached to the estimate explains in detail the necessity for the work item by item.

5. The estimate is not susceptible of further reduction.

For Chief Engineer of Mysore.

Bangalore,
7th May 1917.

V.N.S.

NOTE—Contn sheet.

GPB—3,000—17-12-14

WD 1233—GPL—(0 000—1 12-16—S.

G. R. S. III-2]

General and Revenue Secretariat | Mug File No. 575 of 1914.

Serial No.

27 Subd for orders as to whether a draft sanctioning the revised estimate for Rs 6 485- may be put up and subd to the Dewan and First member. As the cost of the estimate is probably to be met by the P. W. D, it is a point for orders as to whether the necessary orders may not issue from the P. W. D.

28 The question of annual provision for the maintenance of the temple has not been touched upon in the unoffl note now received.

Subd for orders

89 9-5-17 — aym 10/5/17

29 Draft. Sanctioning the revised estimate, the establishment charges being waived and the cost being met (saving) from the P. W. Budget. — Very sarg.

lha 11 5 17

30 Draft subd

89 12-5-17 — aym 14/5/17

31. Put up clean draft

lha 15. 5. 17

32 Submitted with the clean draft

aym 15/5/17

dT

NOTE—Contn. sheet.

WD 1283—GPL—60 000—1 12-16—S

General and Revenue Secretariat | Irrig File No. 676 of 1913-14.

Serial No.	
	Subd to 1st member and Dewan with a draft order sanctioning the revised estimate Sir 16.5.17 Regd the offr. to submit a comp. work-sheet. Done
3169/17.5.17	
6684/21.5.17	Dewan) 19/5 Sir 21 5 17
	Draft approved by the Dewan 22 5 17 Done Sir 25.5.17
6	No: 2972-5 of 5.6.17, I Secy Hassan, compl. bowl. Irrig Supdt & ch Engr in Mysore, Sanctions the revised estte for Rs 5869/- for the completion of the work in question, the cost being met by appropriation in the PWD budget & directs that separate accounts be opened in the matter of the maintenance grant also for.

NOTE—Contn. sheet

SUBJECT No 767.

Repairs to the temple of Sri Chennakesavaswami at Belur

Messrs K Thammaiya, Dande Kesavachar and Kesavadas Iengar, Belur taluk

Summary of Representation.—The Government were very graciously pleased to allot nearly 12,000 rupees for effecting repairs to the temple of Sri Channakesavaswami at Belur, and the work also is nearing completion. It is prayed that before the close of the repairs now under progress, Government may kindly arrange to have all the outside temples also thoroughly repaired, more particularly the ceilings and floors.

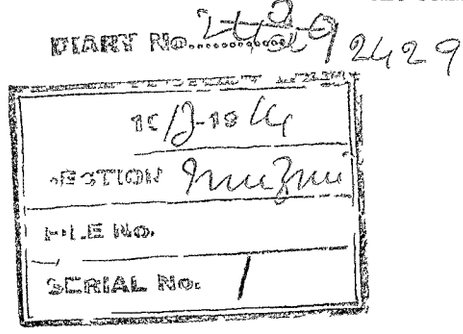

SUBJECT No. 213.

Repairs to Sri Channakesavaswami temple at Belur.

Mr K. Thammiah, Belur taluk

Summary of discussion.—Government were pleased to allot funds for effecting repairs to the temple and the repairs to the roof of the temple are now being done from the funds sanctioned by Government. An estimate for repairing the lower portion of the building has also been prepared. It is prayed that the estimate be sanctioned and the annual maintenance work be undertaken by Government as is done in the case of Halebid temple.

Reply of Government.—Will be considered.

CD. 4

14 C5

Paper

2000-14 6763 - 3

Repairs to the temple of Sri Chauna-
Kesavaswami at Belur-

File No. 676-13

Serial No. 2

G. R. S. 26]

Diary No. of letter replied to 2439

No. 525

General and Revenue Secretariat
(Mysore)
, *the* 191 .

To The Dr Comr,
Hassan Dt

Date of issue 1-9-1914

Signed by Nor. Narasimhaiengar

Sir,

I am directed to invite your attention to Subject No. 767 brought forward for discussion at the last Dasara Representative Assembly regarding the repairs to the Sri Chaunakesavaswami temple at Belur and to request that you will be so good as to have an estimate prepared for the repairs required pointing

over.

SUBJECT.

out the source from which the cost may be met.

Move etc

Sd/- [illegible]
28/8/14

Sd/- [illegible]
28/8/14

Copy of the above is forwarded to the Chief Engineer of Mysore for information.

B. O.

Sd/- [illegible]

PWK(65)
7/8

List of enclosures

Copied by

Examined by

GPB—25,000—4 3 13

No. 4084 /E.III-10.J.

Mysore Public Works Department.

Office of the Superinterding Engineer,

Southern Circle.

Bangalore dated, May 1915.

From

The Superintending Engineer,

Southern Circle, Bangalore.

DIARY No. 1866

19/4/1915

SECTION Muz

FILE No.

SERIAL No. 3

To

The Muzrai Secretary to the Government of Mysore,

BANGALORE.

Sir,

I have the honor to inform you that in accordance with the promise contained in the reply of the Government to subject No. 213 of the Proceedings of the Dasara Representative Assembly of 1914, the enclosed estimate amounting to Rs.11,250/- inclusive of charges for Establishment and Tools and Plant at 10, and per cent respectively on works outlay, has been got up to complete the repairs required to Sri Chennakesavaswary's temple at Belur and if this is sanctioned and work done in accordance with it, all endeavours to preserve the architectural beauties of the temple will have been made.

II. The estimate being a legitimate charge against Muzrai funds, I request you to kindly countersign and return it to me early for submission to the Chief Engineer. An estimate already sanctioned in July 1910 for Rs.12,213/- for the repairs of this temple, is still under operation and its cost to the extent of Rs.6,000/- was met from Muzrai funds and the balance is being met from state funds as per letter No.277/Muz.F.134-09-12 dated 14-8-1912, from the Secretary to the Government of Mysore General and Revenue Departments to the Chief Engineer of Mysore. If you are of opinion that the resources of the temple cannot bear this heavy

heavy charge, I request you to kindly move the Government to order its being debited to the State funds as was done formerly. Besides the question of heavy initial cost, an annual grant of Rs.1,000/- for the up-keep of the present renovation, is also essential and opportunity may now be taken to obtain orders on this point also - as to which department should bear it. In the absence of such a recurring grant, the works may deteriorate soon and in the --- course of a few years, the Government may again be put to the necessity of expending a large sum of money to restore them.

III. The accompanying reports of the Executive Engineer and the Sub Di visional Officer vividly explain the scope of the estimate.

I have the honor to be,

Sir,

Your most obedient servant,

Superintending Engineer,

Southern Circle.

No. 1999 OFFICE OF THE MUZRAI SUPERINTENDENT IN MYSORE,

Encls. as per list *Dated Bangalore, 18th June 1915*

FROM

G.Aravamudu Iyengar, Esq., B.A. B.L.,
~~THE~~ MUZRAI SUPERINTENDENT
IN MYSORE.

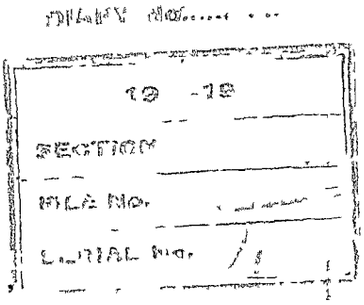

To

D. M. Narasinga Rao, Esquire, B.A. B.L.,
Offg.Secretary to the Government of His Highness
the Maharaja of Mysore, General and Revenue Departments.

SIR,

I have the honor to submit herewith in original for orders, letter No.4652 dated 8th June 1915 together with its enclosures received from the Superintending Engineer, Southern Circle, regarding the repairs to the Sri Channakesavaswami temple at Belur.

I have the honor to be,

Sir,

Your most obedient servant,

Muzrai Superintendent.

No. 6786 /E.III-10.J. Mysore Public Works Department.

Office of the Superintending Engineer,

Southern Circle.

Bangalore dated, 11th August 1915.

From

The Superintending Engineer,

Southern Circle, Bangalore.

To

The Secretary to the Government of Mysore,

Muzrai Department, Bangalore.

DIARY No. 280
1915 16
SECTION Muz
FILE No. 676-1
SERIAL No. 5

Sir,

I have the honor to invite your kind reference to my No.4084 dated 17-5-1915 and subsequent No.4652 dated 8-6-1915 submitting an estimate amounting to Rs.11,250/- together with plans etc., for the complete repairs of the Sri Chennakesavaswamy's Temple at Belur for countersignature and early return and to request that you will be so good as to return the same with the needful done.

I have the honor to be,

Sir,

Your most obedient servant

Superintending Engineer,

Southern Circle.

TVR.

GPB—12,000—28-2-15

191

From

THE SUPERINTENDING ENGINEER,

Circle.

To

Dated

Despatched

Received

General No.

No.

Enclosure No.

Sanctions a revised estimate for Rs 5369 for completing the repairs of Sri Chennakeswaraswami temple at Belur in the Manjarabad taluk

G.R.S. 28]

File No. 676-13
Serial No. 6

Diary No. of letter replied to 1866

GEN. & REV. SECRETARIAT. TYPING Sec. 26 MAY 1917

GENERAL AND REVENUE SECRETARIAT.
(Mug)

Proceedings of the Government of His Highness the Maharaja of Mysore

, the 191

READ—

G. O. No. 2035-97/Mug 136-09-6 dated 12-2-1910 sanctioning estimates aggregating Rs 12,213 for the repairs of the Sri Chennakeswaraswami Temple at Belur.

Date of issue 5. 6. 1917

Signed by [illegible]

ORDER THEREON—No.

2) Correspondence ending with Letter No. 4084 dated 17-5-15 from the Supdg Engr, Southern circle stating that the estimate

over

May this be

i printed?

ii treated as a standing order?

iii published in the Gazette English part?

iv translated?

placed at the disposal of the Press?

vi published in the Gazette Kannada part?

SUBJECT.

GPB—50,000—1-12-12

sanctioned in the above order was still under operation and that some further items of work are necessary to complete the repairs and submitting for sanction an estimate for Rs 11,250 for completing the repairs of the temple and another for Rs 2493 for the repairs of a stone mantap known as Kalachavadi adjoining the temple and adding that an annual maintenance grant of Rs 1000/- is necessary if the building should not be allowed to deteriorate and cost a large sum of money some years hence in renovation.

3) Unofficial note no 154 of 17-5-16 from the Chief Engineer in Mysore submitting a revised estimate for Rs 6485 (inclusive of Rs 616 for establishment, tools and plant charges) for urgent repairs of both the temple and

G.R.S. 27]

GENERAL AND REVENUE SECRETARIAT.

(*Continuation sheet draft form.*)

Enc 3 tracings, one Sanctd Estt, 3 other enclosures
Dated 5th June 1917

and the mantaf and stating that the estimate is not capable of further reduction.

Order thereon: 2972-5
mu 676-13-6

As on the previous occasion, the Establishment, Tools and Plant charges will be waived and the estimate thus reduced to Rs 5869 is sanctioned.

2. As the temple is not in a position to meet the cost of repairs and as the structure is one of great architectural interest, the expenditure will be met by ~~a~~ appropriation in the D. P. W. Budget.

3. The work should be put in hand early and completed through the agency of the P. W. Department. Separate orders will issue as regards the maintenance grant asked for.

16.5.17
Joint Secretary
Mny. Dept.

19/5/17

22.5.17

Pair diff.

19/5/17 P. I. C.

To—

The Ch Engr in Mysore

rel.g the enclosures

" Dy: Comr, Hassan Dt.

" Comptr to Govt

" Asst: Engr in Mysore.

89
15.5.17

GPB—20,000—16-2-14

No. 2282
Date. 10-6-1915
GPB—12,000—23-2-15
1915

From

THE SUPERINTENDING ENGINEER,

Southern Circle.

To

The Executive Engineer
Gooty Division
Bangalore

Dated

Despatched 8th June 1915

Received

General No. 4652

No.

Enclosure No. 2 Reports
1 Sketch
1 copy of letter
4

Re. Sri Chennakesava Swamy's Temple at Belur.

A similar Estimate has been received in the Mines Br. from the Ch. Engr. and is being dealt with there. They may be asked to send with a covering letter Engr.

8/6
9.6.15

4/6
Ch
17/6

No. 4652 /Fnc.2.
E.III-10.J.

Type of Public Works Department.
Office of the Superintending Engineer
Southern Circle.
Bangalore dated , 1915.

From

The Superintending Engineer,
Southern Circle, Bangalore.

To

The Divisional ~~Executive~~ Superintendent
to the Government of Mysore,
Hassan.

Sir,

In continuation of my No.4652 dated 17-8-1915, forwarding an estimate for the complete repairs of the Sri Channakeshavaswamy's Temple at Belur, I have the honor to forward herewith copy of No. 360/E.P.W. dated 7/8-9-1915, received from the Deputy Commissioner Hassan District, to the address of the Executive Engineer, Hassan Division, countersigning the estimate and also the counter-engineer estimate.

I have the honor to be,
Sir
Your most obedient servant,
V Rangacharlu
Superintending Engineer,
Southern Circle.

T/R.

Letter No.290/D.P.W. dated 7/8th. May 1915, from the Deputy Commissioner, Hassan District, to the Executive Engineer, Hassan Division.

With reference to your letter
1915 forwarding copy of abstract
for transmission after the end
ing repairs to the outer ten
Temple at Belur, has the honor to
doing the needful.

2. As regards getting a
Rs.1,000/- sanctioned for
deer made to Govt. ent o
50/S dated 4th. August 191
will be communicated to y

Superintending Engineer,
Southern Circle.

T.P.

Report to accompany estimate for improving Sree Chennakesavaraswami's temple and surrounding sannidies at Belur.

- - - - - & - - - - -

Store Room No. 1.

A new stone pillar and a new bodige for broken one has been provided to prevent danger of the old bodige - falling down in place marked A on plan and the wide wall which is obstructing light is proposed to be dismantled and a brick masonry wall between the new pillar & inserted and the old pillar is provided for the safety of the old bodige. Pial outside is very muddy and presents a very nasty appearance and is giving room for rats etc to make holes in the walls. Country slabbing with cement pointing is provided to prevent all those so that it may be useful in all ways.

Kitchen No. 2.

For the continuation of the pial, country slab flooring with cement pointing is provided for the same reason as - given for store room and to keep in harmony with the adjacent pial. The supports of "ಕುಳಿ ಅನ್ನದ ಕಲ್ಲು" inside are of unshapely boulders and are full of crevices and empty spaces, the slab resting only on pointed ends of the boulders. This gives room for all sorts of insects sometimes serpent also to hide in them and to prevent them in a place where God's "ನೈವೇದ್ಯ" is cooked, the provision is very necessary. Therefore masonry walls enclosing these boulders is proposed to be built at places marked A A A A in plan and cement plastering them since it is a place - where water is much used for cleaning purposes. The floor of the kitchen throughout is much worn out and in some places there are deep pits full of old concrete dust etc. This is a place where huge utensils and fire-wood etc are taken and stocked and therefore it is very necessary that cement plastering throughout the kitchen is to be done hence provision. The door of the kitchen is very old and quite -

quite unserviceable in as much as the ends at the top turning in pivot action are all worn out and in danger of falling. It is therefore proposed to have a new - door instead complete.

Some portions of slabbed ground near the well is sun and water stagnate during rainy season in the low portion above. To prevent it flagging is provided. A beam in the pial in front is broken and to prevent further settling by the weight above a new stone pillar serving as prop is provided.

A lump sum provision for picking ground etc prior to cement plastering and other unforeseen charges levelling big slabs inside are provided since it is necessary and to provide for means for any unforeseen work which may happen where handling old work during execution.

Anebagal No. 3.

Panchakalasa including seats for the above are provided since it is as the principal gate of entrance for God during festivities. throughout the year necessary. A lump sum provision of ₹ 1000/- is made as detailed in the estimate. The present gate is old in eye and is almost tollering the pivot and hinges almost worn out. Repairing the same is not feasible but the pieces can be made use of for other doors etc provided for separate sannadies in the present estimate. Therefore a new door with frames and 5" thick shutters with iron work complete is provided. The roof above is flat without a parapet wall and as the chief entrance do not present very impressive appearance. It is therfore provided to put an ornamental parapet wall of 5 feet height to keep up with the world famed architectural work. The floor of pials in side of entrance door are all sunken and the slabs pavement not in a level. Stone flagging above and cement pointing being necessary are provided. A loney stone in front is broken and fallen down and a gap

gap is formed in front. To keep up symmetry with the heavy course and fill the gap necessary provision is made.

Madhava Samaradhana Pial No. 4.

This pial is being used by Madhavas for town Samaradhana occasions when a great number of people are fed. The floor being muddy and inconvenient. Cuddapan slab flooring with cement pointing throughout the pial is provided. The stone slabbed wall in places marked B B P on plan is wide at joints and cement pointing ~~in~~ as it is necessary.

Yagasala No. 5.

The front ground floor at the entrance is sunk and the rain water stagnates here. To prevent the same and to allow all the stagnated water to flow freely stone - flagging is provided in the sunken portion. The inside which is now only a raised mud platform is very ugly and giving way now and then in clods of mud, often making the room look dirty and unclean. The is maintained during jatra and sacred Homas etc are ~~pur~~ performed there. To make it more secure and neat retaining walls of brick masonry with also a pedestal for God's seat with cement plastering is provided. A pillar wall inside in the place marked D on plan is also proposed to be newly inserted and chunam plastering for the other ~~marks~~ walls which are exposed is provided. The pial in front of Yagasala which is now open with only a 2'' of slabbed parapet in front side is proposed to be enclosed with brick masonry wall and cement plastering making it more useful for provisions etc to be stored during jatra and other festive occasions ~~stores during jatra~~ which is necessary instead of it being left as a place for dust and all other dirty articles to be stored therein as it is at present. teak wood door for the enclosed portion and windows are also provided with cement pointing to floor.

Pagadachari Mantapa No. 6.

Deep cement pointing to the slabbed floor of the -

of the mantapa being necessary is provided since the joints of paved slabs are very wide and deep.

Ramara Sannidhi. No. 7.

Deep cement pointing slabs is provided for the reason said above and the protruding mantapa for Anjaneya carved in the walls is proposed to be removed since it is necessary and occupies much an useful space.

Narasimhara Sannidhi. o. 8.

Deep cement pointing as for am the above sannidhi with stone flagging of pial slabs which are sunk and not in a level are provided. A stone boa which is broke in the garbagudi is now supported by a rude stone pillar prop with a 2' parapet wall below. A wall to the full height of the beam to give additional support to the proposed enclosing it in masonry work firmly and another wall to keep in symmetry with it are proposed to be constructed and thus forming a new garbhagraham altogether. The front walls no forming garbhagudi portion on either side will be dismantled and the additional rooms now made available will be used advantageously for another purpose. The sannidhi outside will thus be made longer. ecessary provisions for the alteration etc as show in plan are provided in the estimate.

Alwar Sannidhi No. 9.

The front ground of Alwar Sannidhi is of mud and dusty. Cuddapah slab flooring the front and stone flagging the pials inside where the slabs are sunk with cement pointing are provided. Other portions where the slabbed floor have wide joints are marked in plan are provided with cement pointing. The present walls forming garbhagudi obstructs the ~~right~~ light and the sannidhi is dark. A portion of the wall - right side has been dismantled for want of light and air and the same looks uglu. To prevent devotees etc entering into the sannidhi during jatra and other festive occasions when a large number of people gath r and at the same time to provide for light and air it is proposed to have teak wood

teak wood lattice frame work put up in place of unsightly mud walls. Necessary provisions for the alterations have been provided in the estimate.

Goeyar Sannidhi No. 10.

Deep cement pointing for the slabbed floor to cover up wide joints have been provided as also removing and re-setting the bulged portion of wall inside garbhagudi as shown in plan. There is no door for sannidhi and therefore nothing prevents all to enter inside. A teak wood battened door is therefore provided. For repairs of walls etc and unforeseen charges a lump sum provision is also made.

Kappe Chennigaraya Sannidhi No. 11.

This sannidhi has 2 entrances one in the east and the other in the north. Thus the most elaborate carvings inside are unprotected without doors. It is quite essential at the carvings inside must be protected from mischief and therefore 2 teak wood doors are provided in the estimate for due protection. The slabs of plalo inside are all sunken and provision is made for resetting them with cement pointing. The bulged portion of wall is also to be dealt with cement pointing. A portion of basement in north east corner has fallen down and to prevent further falling off of it. It is proposed to set it right.

Ammanavara Sannidhi No. 12.

Deep cement pointing to floor to cover up wide and deep joints with stone flagging only in sunken portions are very necessary and provision is made for the same. New doors are proposed in place of old ones. The bulged out portions of wall inside are to be reset. The stone pillars in front are disfigured and present a very unsightly appearance. Provision is made to repair them with masonry where required and cover up unsightly portions.

Vasanta Mantapa No. 13.

This mantapa is situated right in front of Ammanavara sannidhi giving a good appearance in the side of the temple.

This mantapa is greatly used during jatra as God sits here for vasanta. The floor is of old concrete all worn out and full of pits. The parapet above is very unsightly some portion of it having fallen. It is therefore proposed to floor with Cuddapah slabs in place of old concrete and repair the parapet wall. Necessary provisions for the above as also cement pointing steps and base ent and repairing roof with 2 courses of tiles and plastering.are provided.

Vahana mantapa. No. 14.

The present side walls are of mud and are very unsightly being much worn out. Some portions have cracked and is a source of danger too. To prevent all these and keep it in harmony with other sannadhies it is proposed to build new masonry walls in place of mud ones and plaster them.

The floor of the mantapam at present is of mud and very dusty so much so that nearly 6" of dust could be removed easily by hand. This is a place where huge vahanas of weight are kept and handled there. Provision for countersunk slab flooring with cement pointing throughout the mantapam is made in the present estimate.

It must also be noted that this is a place where many visitors assemble to look at the huge in vahanas. They are often reported by the temple authorities to meddle with the vahanas and spoil them. To prevent this kind of danger and at the same time facilitate visitors it is proposed to - build a perforated arch wall of 6' height with a gate in - front. The open space just in front of mantapa is proposed to be pointed since grass is much overgrown in the joints. Front side parapet above the roof presents an ugly appearance since the old plaster is all worn out and fallen in cracks in some places. Under chunam plastering the same is provided for completely plastering the front.

Old Desikar Sannidhi. No. 15.

Two unsightly mud walls in the side are proposed to be dismantled to prevent dirt etc being accumulated therein as

as shown in plan and the slabbed floor pointed in cement to give up a tidy appearance.

Andalamma Sannidhi o. 16.

Deep cement pointing to the slabbed floor outside and inside and flagging with new country x slabs, a portion inside as shown in plan, where it is mud floor are provided in the estimate. For removing and resetting steps a lump sum provision is made.

Granary No. 17.

A portion of slabbed flooring in front of granary has sunk and causes water to stand to allow a free drainage it is proposed to remove and reset them on sandy bed. The present granary being quite close to Ammanavara gudi bandicoots are said to enter from the granary into the garbhagudi by underground passages thus bringing away paddy etc and depositing in the garbhagudi. To prevent this inconvenience it is proposed to separate garbhagudi and granary by removing one ankanam of granary by the side of Ammanavaru gudi and extending the like in the same other mantapam using the same door. Necessary provisions for these are made in the estimate.

Chonni Mantapa No. 18.

Like vasanta mantapa on the other side of the temple premises this mantapa also is one of importance. The parapet on the roof are all distorted and the floor of the mantapa sunk. A new parapet wall and stone x flagging the mantapam floor with cement pointing with new steps are provided in the estimate. The earth mound to the north of this mantapa is a collection of debris and rough stones and boulders and shuts out the way to a greater extent of the flow of rain water. This is very necessary to be removed and provision is therefore made in the estimate for the same.

Desikar Sannidhi. No. 20.

This sannidhi requires only cement pointing to slab -

slab joints and repairing of walls and touching old portions. These are the only items provided in the estimate.

Krishna Sannidhi. No. 21.

A portion of sannadhi outside is of mud floor and is very inconvenient at present. The floor inside also is worn out being of concrete of very old time. Cuddapah slab flooring to the former and cement pointing to the latter with repairs here and there where required are provided in the estimate.

Gagredra Moksha Kola No. 23.

The stone wall in the place marked A in plan has fallen down consequently water from the higher ground above is brought down by means of this gap. To reconstruct the wall from the old stones available is provided in the present estimate. There is a bulging of stone in the place marked B on plan and to prevent further damage it is also proposed to reset it. The parapet wall for this beautiful Kola is high in places and in the southern portion very lo. It will be dangerous during jatra occasions and at other times as it is quite unprotected. To prevent mishaps and accidents it is very necessary that the parapet walls be raised to a uniform height after dismantling the walls that are very high and cement plaster them. There is no door for entrance and it is very necessary to have a door under lock and key to prevent accidents. Hence provision for making a door out of the old materials and also for other unforeseen charges are made.

The cost of removal of earth and debris at the southern portion of the Kola is to be met from the lump sum provisio made as at present the floor of Anjaneya Sannidhi inside i always wet on account of the high level of mud behaind and much more so during rainy weather.

Anjaneya Sannidhi No. 24.

The present old concrete floor of the sannidhi is -

is pitted and giving way now and then making the floor look unsightly. It is proposed to floor with Cuddapah slab. One portion of wall marked B on plan is so dangerous that it requires complete removal and a new one put in its place. The foundations are moreover exposed behind and to protect them with brick masonry is very essential. There is a big stone "Drag" in front of the temple in which debris and unclean articles are thrown. To prevent this it is ~~xxxx~~ also proposed to fill it up with old concrete removed from other places and cement plaster them so as to have provisions for the above items have therefore been made in the present estimate.

Saraswati Gudi No. 25.

One of the beam is cracked and it is proposed to support it with a stone pillar and lump sum provision is also made for sunary repairs.

Mahadwara or Gopuram No. 28.

One of the cones of one Mahasa is fallen and is said to be on the beside the Mahasa. The requirement at present is to fit up the cone in its place if found there or make a new one and fit up. A provision of Rs. 100/- is made to cover up all charges and unforeseen expenditure if any.

Nagarkhana No. 30.

The object for which Nagarkhana is built is not being fulfilled at all at present the function to be done there being performed in a corner of the building apart owing to its being in a dangerous position and without cover. It is unsightly to notice that in front of a beautiful and world famed achetectural temple there should remain old - ruined mud walls above a mantapam with grass etc grown over it. It is therefore proposed to construct walls in brick in mortar after levelling the mud walls and roof therewith with pukka terrace. A door made from old materials is proposed to be used and stone flagging below with cement

cement pointing etc provided. Other provisions required for the above are provided. The lump sum provision made for unforeseen expenditure etc is necessary.

Lump sum provisions for unforeseen charges made in the present estimate under each sanctioned separately are necessary as it cannot be now be made out what extra work will be necessary when handling old buildings.

Signed. C. Narayana Iyer,

No. 3 Sub Divisional Officer,

K. R. Seshadri

Executive Engineer,

Hassan Division.

Report to accompany estimate for Renovating Sri Chenna-kesavaraswamy's temple at Belur.

- - - - - - - - - - -

Reference:- Dussera Subject &

Superintending Engineer's C. dated

- - - - - - - - - - -

The importance of Sree Chennakesavaraswamy's temple at Belur on account of its architectural beauty is well known and need not be dilated upon. The repairs of this temple have been receiving attention by piece meal since the year 1900 or so and have ~~xxxx~~ not been completed yet. The works of restoration carried out till now are:-

(1) The roof of the main temple has been retarraced and completely repaired.

(2) The roofs of almost all the surrounding temples and kitchen and stores &c in the area are have also been repaired.

(3) The gopuram constructed in Dravidian style at the entrance has been strengthened and repaired.

(4) Repairs of a somewhat minor character have been carried out to parts found in a bad state of dis-repair.

Repairs to item No. 1 were carried out probably during Mr. Nagavkar's time. Repairs for the other items have been nearly completed at a cost of about Rs.10,000/-.

2. There still remain many works to be done to complete the renovation, and the public and the citizens of Belur have been clamouring for the restoration to be completed and for the sanction of a permanent annual repair grant to maintain the temple in good condition. The works required to complete the restoration are:-

(1) Repairs to the flooring of the kitchen, stores and all the outer temples.

(2) Flooring for the pials and verandahs which now look untidy and in a state of disrepair.

(3) Renewal of some of the doors of the outer temples.

(4) Improvements to the Vahan antapan and some of the outer temples.

(5) A kalasam and minor gopuram to Anebagalur or Mahadwaram.

(6) Iron railings and a gate-way in front of Garbagudi.

N. B. --(The entrance door to the inner temple has fine carvings and those are being damaged - by the door being frequently opened and ~~shut~~ shut against the carved door parts ~~closed~~. The public want this door to be kept open always to get a view of God, but owing to the costly jewellery kept inside, this cannot be done. Hence iron railings with a gate have been proposed. The railings have been prepared already, but owing to the size being unsuitable, it requires modification. Hence its inclusion in this estimate.)

(7) Minor repairs.

(8) A gopuram over the Garbagudi.

5. The estimate now submitted provides for all the works of renovation noted above except item (8). The latter work has been entrusted to Mr. Lakshminarnappa, Assistant Engineer, Mysore Range.

4. Since the Superintending Engineer recently inspected the temple the items provided for in the estimate were shown to him, and no further comments are required. All that ~~I~~ is necessary to state is that the repairs of the temple will be complete if the estimate now submitted is sanctioned. In spite of repairs ~~and~~ many to the roofs of the outer temples, the floor of these temples and many of their other parts look somewhat squalid, and sanction to the estimate to make them fit surroundings to the main - temple seems absolutely necessary. Besides this, many of

of the outer temples are in themselves architectural works of importance and require to be preserved on - their own merits.

5. Details of work proposed for each temple are clearly shown in the estimate, and what are considered suitable rates to this kind of work have been entered. But it should be borne in mind that in restoring works of architecture, changes will be necessary during execution and accurate forecasts are not possible, and hence ultimately some small excess over the estimate submitted may become necessary. The total estimated cost of all the works amounts to ... 10,177/-.

6. A copy of the report of the Sub Divisional officer in charge is also forwarded herewith and the repairs provided for are explained seriatum in it.

7. Early sanction is requested for the estimate.

K. R. Seshadri.

Executive Engineer,

Hassan Division.

Dms

Abstract.

Items of work.	Per	Rate	Quantity.	cost	Total
No: 1 Store Room.					
Providing a new stone pillar with bedigeon	cft	2 - -	9	18	
Burnt brick in mortar	- " -	- 4 -	8	2	
Lunam plastering	sqrs	4 - -	30	1	
Paving with Country slabs 3 thick over sand bed	sft.	- 6 -	158	59	
ement pointing	sqrs	4 - -	1.58	6	
ismantling wall, Levelling ground and other unforeseen charges	Lump	Sum Rs		15	
Total					101
No: 2 Kitchen.					
ving with Country slabs on sand bed	sft.	- 6 -	311	117	
oring with good bricks on edge and good pointing	cft	- 5 -	50	16	
ent brick in mortar	- " -	- 4 -	58	15	
ment plastering	sqrs	9 - -	12·62	114	
winding a new pounding stone + pestle	Lump	Sum Rs		5	
teak wood buttened door complete	sqft.	2 - -	25	50	
stone flagging	sqrs	5 - -	4·96	25	
w stone pillar	cft.	2 - -	4	8	
king surface & old floor levelling providing drainage and other unforeseen Charges	Lump	Sum Rs		30	
Total					380
No: 3 Anebagal.					
epairing an ornamental mes at and fixing 5 new brass Kalasams over.	L	Sum Rs		1,000	This is very necessary.
ood gate shutters 3' including iron works to complete.	sft	2 - -	147	294	
Carried over				1,294	481.

Brought forward					1,294	4
Old stone flagging pial	Sqr:	5	.	1.84	9	
Ornamental parapet wall 3' high with 9" cornice	Sft	3	.	110	330	
New loovy stones.	Sft	1	8	35	53	
Total						1,6
No. 4 Madhava Samavadhana Pial						
Kadapa slab 1½ flooring over 2" Concrete and cement pointing	Sqr:	32	.	13.92	348	
Cement pointing for other places	Sqr:	4	.	5.20	21	
General repairs &c	Lump sum				Rs 10	
Total						3
No. 5 Yagasala.						
Removing and refixing old stone flagging	Sqr:	5	.	1.80	9	
Burnt brick in morlar	Cft	-	4	326	82	
Teak wood battened door complete	Sft	2	.	18	36	
——do—— windows battened shutters &c complete	Sft	2	.	18	36	
Chunam plastering	Sqr:	4	.	6.53	26	
Cement pointing	—"—	4	.	1.00	4	
Burnt stone slabs dressed	Sft	.	7	17	7	
Filling with gravel the "Agnikunda" and other unforeseen repairs	Lump Sum				Rs 10	
Total						
No: 6 Pagadachari Mantapam						
Cement pointing	Sqr:	4	.	4.33	17	
Putting up 3 course of flat tiles, one course in cement, over the leaky portion with cement plastering	Sqr:	26	.	5.20	135	
Total						1
No: 7 Ramara Sannidhi						
Cement pointing	Sqr:	4	.	9.69	39	
Removing the pitch of Anjaneyaswamy repairing walls & other unforeseen Char					Rs 20	
Total						
Carried over—						

No: 8 Narasimhaswamy Sannidhi							
Cement pointing	Sqr:	4	-	-	7.83	31	
~~Teak wood battened door complete~~	~~Sft~~	~~2~~			~~15~~	~~30~~	
Old stone flagging	Sqr:	5	-	-	3.21	16	
Burnt brick in mortar	cft	-	4	-	162	41	
Chunam plastering	Sqr:	4	-	-	2.88	12	
Dismantling walls, repairing steps and other unforeseen charges	Lump sum				Rs	30	
Teak wood door ½ pannelled and shutters &c ½ bared complete.	Sft.	2	-	-	32	64	
Burnt stone slabs, as detailed	cft.	2	-	-	9	18	
Total							212
No: 9 Alwar Sannidhi							
-adapa 1½" slab flooring on 2 inch concrete including Cement pointing	Sqr:	32	-	-	3.78	121	
Stone flagging	Sqr:	5	-	-	3.92	20	
ment pointing other places	"	4	-	-	6.17	25	
k wood trellis work	Sft	1	8	-	135	203	
mantling walls & other unforeseen charges	Lump sum				Rs	15	
Total							384
:10 Jeeyar Sannidhi							
nent pointing	Sqr:	4	-	-	7.64	31	
k wood battened door complete	Sft	2	-	-	15	30	
moving and resetting bulged portion	"	-	12	-	63	47	
iring walls & here & there							
der piring Cement pointing							
ll) other unforeseen charges	Lump sum				Rs	20	
Total							128
Kappechennigaraya Sannidhi							28
"ak wood door ½ pannelled & shutters & complete	Sft	2	-	-	62	124	
flagging	Sqr:	5	-	-	3.51	19	

-77/-

Cement pointing	sqr:	4	-	-	3·51	14
Repairing fallen basement in South eastern corner & other unforeseen charges	Lump Sum Rs					60
Total						216

No: 12 Ammanavara Temple

Cement pointing	sqr:	4	-	-	19·46	78
Stone flagging	—"—	5	-	-	3·00	15
Teak wood door. shutter 3" thick with iron work &c complete	sft	2	-	-	66	132
Repairing pillars with masonry work Chunam plastering here and there and other unforeseen charges	Lump Sum Rs					50
Total						3

No: 13 Vasantha Mantapam.

Kadapah slab flagging with cement pointing	Sqr:	32	-	-	1·69	54
Old stone in chunam chiselled	cft	-	6	-	240	90
Cement pointing	sqr:	4	-	-	3·58	14
Pulling up 3 courses of flat tiles one course being in cement with Chunam plastering	sqr:	26	-	-	1·69	44
Chunam plastering	—"—	4	-	-	3·00	12
Scaffolding charges	Lump sum Rs					20
Repairing old parapet wall & other unforeseen charges	Lump Sum Rs					20
Total						2

No: 14 Vahana Mantapam.

Burnt brick in Chunam	cft	-	4	-	1404	351
Chunam plastering	sqr:	4	-	-	32·98	132
Perforated brick wall 6' high with a gate E ing with Country Slabs pointing	sft	-	4	-	306	77
	—"—	-	6	-	2523	821
	sqr:	4	-	-	25.23	101

mantling old walls, removing repairing basement and walls, removing old Concrete underpinning and Unforeseen charges.	Lump	Sum	Rs		75	
Total						155
No. 15 Old Desikar Sannidhi						
cement pointing	Sqr:	4	-	-	1.28	5
Removing walls, removing Kallachi repairing basement &c.	Lump	Sum	Rs		15	
Total						20
No: 16 Andalamma Sannidhi						
Pulling up 3 course of flat tiles one course being in Cement with Chunam plastering	Sqr:	26	-	-	3.90	101
want brick in chunam	cft.	-	4		6.75	169
Chunam plastering	Sqr:	4	-	-	12.00	48
Paving with Coumbry Slabs	Sft.	-	6	-	135	51
cement pointing	Sqr:	4	-	-	8.89	36
removing and resetting steps and other unforeseen charges	Lump	Sum	Rs		40	
Total						445
17 Granary						
to stone flagging	Sqr:	5	-	-	9.60	96
want brick in mortar	cft.	-	4	-	140	35
Chunam plastering	Sqr:	4	-	-	2.21	9
mantling walls, removing debris removing & refixing doorway & other unforeseen charges.	Lump	Sum	Rs		10	
Pulling up 3 Courses of flat tiles one Course being in cement in ing Chunam plastering.	Sqr:	26	-	-	3.00	78
Total						228
Piol & Mantapam East of Granery.						
up 3 courses of flat tiles, one in Cement & Chunam plastering	Sqr:	26	-	-	14.50	377

Concreting in Chunam	cft	.	3	-	136	29
Repairs to spouts & unforeseen Charges	Lump sum				Rs	13
Total						42
No 19 Chenni Mantapam						
Old stone flagging	sqr.	5	-	-	1.00	5
Cement pointing	-"-	4	-	-	1.00	4
New heavy stone	sft:	1	8	-	8	12
Burnt brick in mortar	cft	-	4	-	103	26
Chunam plastering	Sqr:	4	-	-	2.21	9
Scaffolding charges	Lump Sum				Rs	20
Putting up 3 courses of flat tiles one course being in cement including Chunam plastering	Sqr:	26	-	-	1.00	26
Putting up new steps &c as detailed	Lump Sum				Rs	75
Total						
No: 20 Desikar Samadhi						
Cement pointing	Sqr:	4	-	-	1.13	5
Repairing walls &c as detailed	Lump Sum				Rs	20
Total						2
No: 21 Krishnadevara Samidhi						
Kadapa Slab flooring on 2" concrete &c.	Sqr:	32	-	-	.64	20
Cement plastering	-"-	9	-	-	.48	4
Under pinning walls &c as detailed	Lump sum				Rs	15
Total						3
No: 23 Gajendra moksha Kalyanam						
Old stone work in mortar	cft	-	6	-	180	68
Removing & resetting bulged portions	sft	-	12	-	80	60
Door from old materials available					sum Rs	15
Burnt brick in mortar	cft	-	4	-	592	148
Coping including cement plastering	Rft	-	8	-	136	68
Cement plastering	Sqr:	9	-	-	9.10	82
Ground &c as detailed in the book					Rs	100
Total						

No 24 Anjaneya [illegible] Sannidhi

Kaa a floor 1½" flooring 2 coats + cement pointing.	Sqr.	32	-	-	1.08	35
Burnt brick in mortar	cft	-	4	-	135	34
Chunam plastering	Sqr.	4	-	-	2.00	8
Underpinning walls &c as detailed	Lump sum					50
Total						127
No: 25 Saraswati Gudi						
New stone pillar	cft	2	-	-	4	8
Repg: old damaged portions of wall & other unforeseen charges.	Lump Sum					20
Total						28
No: 26 Gopuram						
Refilling the fallen cone of Kalasa & unforeseen charges	Lump sum					100
Total						100
No 30 Nagorkhana						
Dismantling old mud walls removing debris and unforeseen charges	Lump Sum					25
Burnt brick in mortar	cft	-	4	-	426	106
Door from old materials	Lump sum					15
Stone slabs	sft	-	7	-	63	28
Chunam plastering	Sqr.	4	-	-	8.38	33
Teak wood joists	cft	4	-	-	31	124
Pukka terrace flooring with 3" concrete & Chunam plastering	Sqr.	30	-	-	2.86	86
Sunice	cft	-	3	-	63	12
Parapet wall	cft	-	8	-	78½	39
	cft	1	8	-	78½	118
Scaffolding Charges	Lump sum					50
To stone flagging	Sqr.	5	-	-	2.50	13
ment pointing	"	4	-	-	3.64	15
Total						664
Whole Total						8873
Contingencies at 5%						444
amount for erecting an angle frame with railings in entrance near Garbhagudi detailed estimate & pl						860
Grand Total Rupees						10177/-

Grant Total Rupees

Hassan
14/1915

K. R. Seshadri
Executive Engineer
Hassan Divn

Deputy Commissioner
Hassan District

Mysore Public Works Dept

Hassan Division

Estimate of the
probable cost of improving
Sri Chennakeshavaswamy's
temple at Belur, Hassan Distt

Estimate amount Rs 10,177/-